




Note: Model with "U" means can be power by power bank.  
Model with "H" means have remote function.

Model	size	Power	USB output	light power	maximum illuminance	color temperatu	RA	knob function		power supply mode		Remote control function	Remote control channel	USB output	USB port	Picture
								knob 1	knob 2	adapter	other					
R-200	10inch	8 W	/	8W	450 Lux(0.5m) 120Lux (1m)	3200K-5600K	CRI>95	brightness	color temperature	5V 2A 10W	power bank	/	/	/	/	
R-201	10inch							brightness	color temperature			yes	3			
RL-202	10inch	18 W	12W	30W	750 Lux(0.5m) 200 Lux (1m)	3200K-5600K	CRI>95	brightness	color temperature	15V 2A 30W	use RL-2F battery adapter with NP-F series battery. 	/	/	5V 2.4A(max)	1	
R-203	10inch		12W					brightness	color temperature			yes	3		1	
R-204 (40W)	15inch	40 W	12W	52W	850 LUX(1m)	3200K-5600K	CRI>95	adjust 3200K LED beam brightness	adjust 5600K LED beam brightness	15V 4A 60W	use RL-2F battery adapter with NP-F series battery. 	/	/	5V 2.4A(max)	2 (parallel connection)	
R-205(40W)			12W									yes	3			
R-206(55W)	18inch	55 W	12W	67W	1400 LUX(1m)	3200K-5600K	CRI>95	adjust 3200K LED beam brightness	adjust 5600K LED beam brightness	15V 5A 75W	use RL-2F battery adapter with NP-F series battery. 	/	/	5V 2.4A(max)	2 (parallel connection)	
R-207(55W)			12W									yes	3			
R-208(70W)	20inch	70 W	12W	82W	1750 LUX(1m)	3200K-5600K	CRI>95	adjust 3200K LED beam brightness	adjust 5600K LED beam brightness	15V 6A 90W	use RL-2F battery adapter with NP-F series battery. 	/	/	5V 2.4A(max)	2 (parallel connection)	
R-209(70W)			12W									yes	3			

10inch

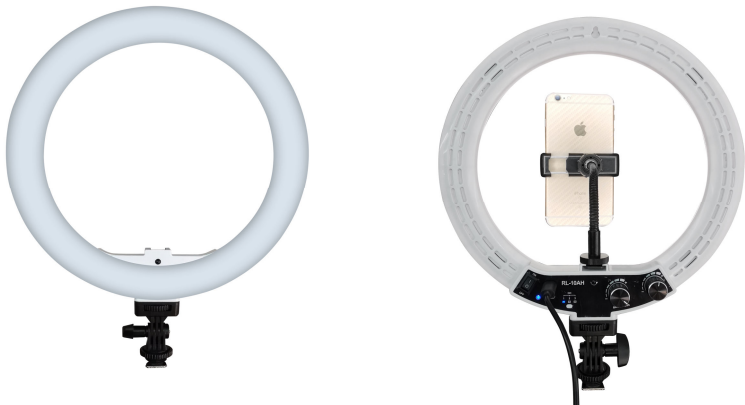

RL-10AU: power by power bank or USB adapter  
RL-10AHU:power by power bank or USB adapter,support remote control

10inch DC



RL-10A: power by 15V 2A 30W or RL-2F NP-F battery adapter  
RL-10AH: power by 15V 2A 30W or RL-2F NP-F battery adapter, support remote control

15inch



power by adapter or RL-2F NP-F battery adapter  
2 USB port for charging phone



18inch



power by adapter or RL-2F NP-F battery adapter  
2 USB port for charging phone



20inch



power by adapter or RL-2F NP-F battery adapter  
2 USB port for charging phone



The height of the stand is 1.6 cm